



www.keeslift.com

FOLLOW US

















QUALITY is never an accident.

It is always the result of intelligent and consistent effort.

KEES INDUSTRIES INDIA PVT. LTD. committed to provide splendid quality product and service that fit customer needs and fulfill customer expectations.

KEES at its most basic level, manufacturing quality is conformance to specification. Quality of design and conformance to specifications provide the fundamental basis for managing operation to produce quality products.

The inherent characteristic of a product or service created to satisfy customer needs, expectations and requirements are quality characteristic such as weight, shape, speed, reliability etc.

OUR

MISSION

STATEMENT

KEES is committed to play leadership role in elevator industry. We supply excellent product with the most innovative modular design and advanced engineering and commitment to provide 24/7 service backup.

KEES Supported by experts and hard-working professionals, who put their level best towards attacking the goal of our organization. These professionals possess vast industry knowledge and are capable of offering the products as per the set industry standard. Our professional always work in close concert with valued customer to understand their specific needs.



ABOUTOUR COMPANY

We take pleasure in manufacturing a wide range of lift such as **passenger lift**, **goods lift**, **hospital lift**, **structure lift**, **home lift**, **dumbwaiter** etc. The company has been able to successfully expand its product portfolio to meet customer requirements across various segments with elevators.

We here became one of the leading elevator company with excellent engineering capabilities in **India**. We are known as **manufacturer**, **supplier**, **dealer** and **service provider** of impeccable range of elevator doors, ss cabin, door frame, bracket, guide rail and complete lift kit.

Our most important capital is the perfect synergy of employee competence and effective use of global "know how" through researches and practical applications with an **objective** to provide quality solution at **affordable** price.

We have set new benchmark in the industry in believing the customer philosophy and satisfaction.


WHY KEES? OUR UNIQUE ABILITIES



RELIABLE PRODUCT :

The elevator and elevator parts we use are of excellent quality and 100% available with us for **KEES FAST SERVICE**

SERVICE & MAINTENANCE:







CUSTOMER FLEXIBILITY:

Fastest delivery in segment personalize your complete elevator

AFFORDABLE PRICE:

Price is very reasonable in comparison with other companies





SAFETY:

Available safety and healthy work place which protects worker from injury, and increases productivity, quality and employee morale

KEES STATEMENT

Value based performance, ethics, transparency of operations and spirits of excellence epitomize **KEES**



AUTO RESCUE DEVICE

It should be "In case of a main power supply failure, the lift stopped between two floors is moved to nearest floor in the down ward direction, the automatic door is opened and passengers are out safely"

INFRARED LIGHT CURTAIN

Full height infra red curtain with multiple cross-crossing light beams detect the smallest obstruction in door path and stop doors from closing.

OVER LOAD SENSOR WITH AUDIO VISUAL INDICATION

On overloading of the lift, car audio-visual indication is provided and doors are kept open till excess load is removed.

CAR EMERGENCY LIGHT & FAN

The emergency light is always illuminated in normal condition and switches itself automatically to battery back up in case of power failure as shown in picture. (Block-D) Fan also operates for minimum 20 minutes after power failure.

EMERGENCY ALARM & 'PUSH TO TALK'

In case of any emergency or power failure, help can be obtained by alarming or by communicating at lobby through this system which is battery operated and self charging as shown in picture. (Block-E)

SAFETY IN CASE OF OVER TRAVEL

Three phase electric power is disconnected from control panel and motor, the moment elevator car moves beyond the limit of top and bottom terminal floors causing immediate application of the brake to bring the elevator to halt.

SAFETY IN CASE OF ROPE BREAKAGE

In the elevator of breakage of ropes, elevator speed exceeds the rated speed in the downward direction due to gravitational acceleration, the over speed governor activates the clutch mechanism thereby switching off main controls and jamming the elevator car safety on guide rails.

CAR FAN AUTOMATIC SLEEP

Car fan automatically stops when there are no registered floor calls resulting into saving in power and enhancing its life.

VOICE ANNUNCIATOR WITH MUSIC

This system provides detailed information to passengers related to next floor, direction of movement, door opening/closing, scheduled operations and other information depending on the building needs. This system features natural electronic voice synthesizers.

PASSENGER LIFT



STANDARD MODEL





A **Collapsible Door** consists a mild steel frame with two vertical pieces of mild steel channel about **15mm to 20mm wide** are jointly hollow portion of channel inside

- These doors are commonly recommended in the situations where light and ventilation are desired even when the opening is closed.
- These doors are also used from the consideration of safety and protections of the property.
- These doors are extensively used for shops, garages, public buildings, godowns etc.

DIMENSIONS DETAILS: STANDARD APARTMENT LIFTS (MANUAL OPENING COLLAPSIBLE DOOR)

	CAPACITY		CAR II	NSIDE	LIFT	WELL	CLEAR ENTRANCE	CLEAR OPENING AT ENTRANCE
1	PERSON	Kgs.	W	D	W	D	E	W x D
	4	272	1100	700	1500	1100	760	1175 X 2225
	5	340	1170	820	1550	1225	760	1175 X 2225
	6	408	1170	920	1550	1325	760	1175 X 2225
	8	544	1300	1100	1700	1500	760	1175 X 2225
	10	680	1300	1300	1700	1500	800	1235 X 2225

Move Next Feel Best ISO 9001 : 2015 Certified Company

PASSENGER LIFT

● ● STANDARD MODEL



The door may have single shutter or two shutters. The shutters are fixed with special hinges known as double action spring hinges which hold the shutter in closed position when not in use. These types of door is generally provided in passengers of public buildings like offices, banks etc.



Imperforated doors are the perfect modern alternative to a collapsible door elevator.

A perfect pocket friendly elevator at very minimal cost amplified the beauty of your apartment

DIMENSIONS DETAILS: STANDARD APARTMENT LIFTS (MANUAL SWING DOOR)

All Dimensions are in mm size.

CAPACITY		CAR II	NSIDE	LIFT	WELL	CLEAR ENTRANCE	CLEAR OPENING AT ENTRANCE
PERSON	Kgs.	w	D	W D		E	W×D
4	272	1100	700	1500	1100	760	1000 X 2150
5	340	1170	820	1550	1225	760	1000 X 2150
6	408	1170	920	1550	1325	760	1000 X 2150
8	544	1300	1100	1700	1500	760	1000 X 2150
10	680	1300	1300	1700	1500	800	1000 X 2150

DIMENSIONS DETAILS: STANDARD APARTMENT LIFTS (IMPERFORATED DOORS)

CAPACITY		CAR II	NSIDE	LIFT	WELL	CLEAR ENTRANCE	CLEAR OPENING AT ENTRANCE			
PERSON	Kgs.	w	D	w	D	E	WxD			
4	272	1100	700	1500	1100	760	1175 X 2225			
5	340	1170	820	1550	1225	760	1175 X 2225			
6	408	1170	920	1550	1325	760	1175 X 2225			
8	544	1300	1100	1700	1500	760	1175 X 2225			
10	680	1300	1300	1700	1500	800	1235 X 2225			

PASSENGER LIFT



• • • STANDARD MODEL





durability

KEES Telescopic door having a powerful, fully manual sliding doors. They can be adjusted for the demands of many environments.

KEY BENEFITS:

Exceeds the highest standards regarding safety, durability and felxibility

Suitable for many different types of buildings and space efficient

Equipped with an intelligent control system that is easily adjusted for many different environments

This product of ours is a market winner among our customers. They are the perfect manual alternatives to a regular auto door elevator

DIMENSIONS DETAILS: STANDARD APARTMENT LIFTS (MANUAL OPENING TELESCOPIC DOOR)

CAPACITY		CAR II	NSIDE	LIFT	WELL	CLEAR ENTRANCE	CLEAR OPENING AT LANDING FOR 2 FOLD	CLEAR OPENING AT LANDING FOR 3 FOLD	
PERSON	Kgs.	w	D	w	D	E	W x D	W x D	
4	272	1100	700	1550	1250	700	920 X 2000	1250 X 2000	
5	340	1170	820	1550	1375	700	920 X 2000	1250 X 2000	
6	408	1170	920	1550	1475	700	920 X 2000	1250 X 2000	
8	544	1300	1100	1700	1675	800	1000 X 2000	1400 X 2000	
10	680	1300	1300	1700	1875	800	1000 X 2000	1400 X 2000	

Move Next Feel Best ISO 9001 : 2015 Certified Company

PASSENGER LIFT

DELUX MODEL







■ KEES serve clients with an entire gamut of automatic doors. These are power assisted doors whose movement is achieved with the help of a PIR (Passive Infrared) sensor from a considerable distance.

DIMENSIONS DETAILS: DELUX APARTMENT LIFTS (SIDE OPENING)

All Dimensions are in mm size

BIIVIEIVOIOIVO	DE 17 (120 .	DELOXITATA	All Difficultions are in mini size.					
CAPAC	CITY	CAR II	NSIDE	LIFT \	WELL	CLEAR ENTRANCE	CLEAR OPENING AT LANDING	
PERSON	PERSON Kgs.		D	W D		E	W x D	
5	340	1100	850	1500	1450	700	950 X 2000	
6	408	1100	950	1500	1550	700	950 X 2000	
8	544	1200	1200	1600	1775	800	1050 X 2000	
10	680	1250	1250	1800	1825	900	1150 X 2000	
13	884	1500	1500	1900	2100	900	1150 X 2000	

DIMENSIONS DETAILS: DELUX APARTMENT LIFTS (CENTRE OPENING)

CAPAC	CITY	CAR II	NSIDE	LIFT \	NELL	CLEAR ENTRANCE	CLEAR OPENING AT LANDING FOR 2 FOLD
PERSON	Kgs.	w	D	w	D	E	W x D
4	272	1100	700	1550	1250	700	920 X 2000
5	340	1170	800	1600	1350	700	920 X 2000
6	408	1170	900	1600	1450	700	920 X 2000
8	544	1300	1100	1750	1600	800	1020 X 2000
10	680	1300	1300	1750	1850	800	1020 X 2000
13	884	1800	1300	2250	1850	900	1120 X 2000
16	1088	1850	1500	2250	2050	900	1120 X 2000
20	1360	2000	1500	2450	2050	1000	1120 X 2000

PASSENGER LIFT



● ● PREMIUM MODEL





AUTO DOOR WITH MEDIUM VISION GLASS



AUTO DOOR WITH LONG VISION GLASS



GOLDEN FINISH AUTO DOOR FULL VISION GLASS

KEY BENEFITS:

- Robust Constructions
- Safety PIR Sensor
- Power Operated Door
- Long Service Life

- Complete outside visibility from inside the lift
- Passengers can rescue easily due to vision panel on doors. This is a best safety feature for commercial purpose elevator



GOODS LIFT

• • GOODS LIFT





- KEES goods lift are suitable for transporting heavy goods from one store to another having the capacity that ranges from 1000 kg to 4000 kg.
- We supply goods lift with dust proof equipments as per our customers' requirement.
- These goods lift are highly customizable enabling the client to fit the product exactly to his needs and requirements.

DIMENSIONS DETAILS: GOODS LIFT

CAPACITY	CAR INSIDE		CAR INSIDE		CAR INSIDE		CAR INSIDE		CAR INSIDE		CAR INSIDE		CAR INSIDE		CAR INSIDE		CAR INSI		L	IFT WE	LL	CLEAR ENTRANCE	WALL OPENING	WALL OPENING	MAC	CHINE R	OOM	PIT	O.H	SPEED
LOAD IN KG	w	D	w	AUTO-DOOR	COLLAPSIBLE	E	AUTO-DOOR W x D	COLLAPSIBLE W x D	G	н	HEIGHT			Mt / Sec																
500	1200	1200	1850	1650	1450	800 x 2000	1020 x 2150	1150 x 2225	2700	2700	2500	1600	4200	.35 mps																
1000	1700	1600	2350	2050	1900	1200 x 2000	1500 x 2150	1625 x 2225	3500	3000	2500	1600	4600	.35 mps																
1500	2000	2000	2700	2450	2300	1500 x 2000	1500 x 2150	1625 x 2225	4000	4000	2500	1600	4600	.35 mps																
2000	2200	2500	2900	2950	2800	1500 x 2000	1800 x 2150	2000 x 2225	4000	4200	2500	1600	4600	.35 mps																
2500	2500	2500	3200	2950	2800	1600 x 2000	1800 x 2150	2000 x 2225	4500	4500	2500	1600	4800	.35 mps																
3000	2500	3200	3200	3650	3500	1600 x 2000	1900 x 2150	2100 x 2225	4500	5200	2500	1600	5200	.35 mps																
4000	2500	4000	3400	4450	4300	2000 x 2000	2300 x 2150	2600 x 2225	4500	6300	2500	1600	5200	.35 mps																

HOSPITAL LIFT



• • HOSPITAL LIFT





- Hospital bed lift generally transport patients who are not well enough to sit up even in a wheelchair.
- Hospital lift are manufactured to consume extremely low amount of power and to be durable with a number of safety features. Most often there will be a rear and a front entry to the elevator cabin.

KEY BENEFITS:

- Smooth & Jerkless Start and Stop
- Longlife & Low power consumption
- Longlife superior in performance and reliable
- In-built ARD installed for the purpose to rescue patients at the time of power failure
- Overload indicator and extra safety features are used in hospital lift

DIMENSIONS DETAILS: HOSPITAL LIFT

	CAR INSIDE		LIFT WELL		CLEAR ENTRANCE	CLEAR OPENING AT LANDING	O.H	PIT	SPEED	
ТҮРЕ	CAPACITY	w	D	w	D	E	WxD			
WHEEL CHAIR	544 kg	1100	1300	1700	1850	800	920 X 2000	4200	1600	.63 mps
STRETCHER	750 kg	1000	2100	1700	2500	800	920 X 2000	4400	1600	.63 mps
SMALL BED	1020 kg	1200	2100	1900	2500	900	1120 X 2000	4400	1600	. 63 mps
STANDARD BED	1360 kg	1600	2400	2500	2800	1200	1420 X 2000	4400	1600	.63 mps

MRL LIFT




MRL LIFT

GEARLESS MACHINE-ROOMLESS REVOUTION







Conventional Machine Room

Machine-Roomless with Control Room

True Machine-Roomless

- Machine room less elevators are designed so that most of the components fit within the shaft containing the elevator car and a small cabinet houses the elevator controller
- KEES explore of permanent synchronous gearless traction machine technology which represents for future developing orientation of the elevator, energy and space saving and building cost reduction are max characteristics of this core technology which leads this industries in the world.
- It supplies the infinite creation possibilities in the limited space of modern architectures.

DIMENSIONS DETAILS: MRL LIFT

CAPAC	ITY	CAR II	NSIDE		LIFT	WELL		CLE/ ENTRA		WALL OPENING	3	PIT DEPTH	OVER HEAD	SPEED	
				MANUAL TELESCOPIC	CENTRE SLIDE OPP	MANUAL TELESCOPIC	CENTRE SLIDE OPP	MANUAL TELESCOPIC	CENTRE SLIDE OPP		ENTRE IDE OPP				
PERSON	KGS.	w	D	W)	E		W x D					
5	340	1100	820	1750	1750	1250	1200	700	700	920 X 2150 920	X 2150	1600	4200	1 MIN. / SEC.	
6	408	1100	920	1750	1750	1350	1300	700	700	920 X 2150 920	X 2150	1600	4200	1 MIN. / SEC.	
8	544	1200	1200	1850	1850	1650	1550	800	800	1020 X 2150 102	0 X 2150	1600	4200	1 MIN. / SEC.	
10	680	1300	1300	1950	1950	1750	1650	800	800	1020 X 2150 102	0 X 2150	1600	4200	1 MIN. / SEC.	
13	884	1500	1500	2150	2150	1950	1850	900	900	1150 X 2150 115	0 X 2150	1600	4600	1 MIN. / SEC.	
15	1020	1500	1500	2500	2500	1950	1850	900	900	1150 X 2150 115	0 X 2150	1600	4600	1 MIN. / SEC.	



HOME LIFT



KEY BENEFITS:

- No separate machine room required
- Energy efficient, Compact design, self-contained drive system and shallow pit
- Exclusive PLC Controller standard and class leading technology
- An array of customization options to make it uniquely yours

HOMELIFT:

Operate on single phase power supply and does not require a pit. It is applicable for the villas and duplex apartment without the lifts and meet customers' quality life requirements.

DIMENSIONS TABLE: HOME LIFT

CAPACITY 4 PERSONS OR 250 KG											
	CAR I	NSIDE	LIFT	WELL	CLEAR ENTRANCE	O.H	PIT	SPEED			
ТҮРЕ	w	D	w	D	E						
MANUAL COLLAP.	900	1000	1450	1250	700	2900	400	.35 mps			
TELESCOPIC AUTO DOOR	900	1000	1500	1400	700	2900	400	.35 mps			
CENTER OPP. AUTO DOOR	1000	900	1600	1250	700	2900	400	.35 mps			
CENTER OPP. FOUR DOOR	900	1000	1500	1500	800	2900	400	.35 mps			

All Dimensions are in mm size.

DUMBWAITER LIFT




- **Dumbwaiters** are small freight elevators that are intended to carry food rather than passengers.
- They often link kitchens with other rooms.
- When installed in restaurants, schools, kindergartens, hospitals, retirement homes or in private homes, the lifts generally terminate in a kitchen.
- Avg heigh of the car ranges from 0.8m tp 1.2m.

DIMENSIONS TABLE: DUMBWAITER LIFT


LOAD CAPACITY : 50 Kg to 250 Kg											
CAR II	NSIDE	LIFT \	NELL	HEIGHT	CLEAR ENTRANCE						
W	D	W	D	E	W x D						
600	600	1450	1250	600	600 x 600						
900	900	1500	1400	900	900 x 900						





SAMPLE DRAWING

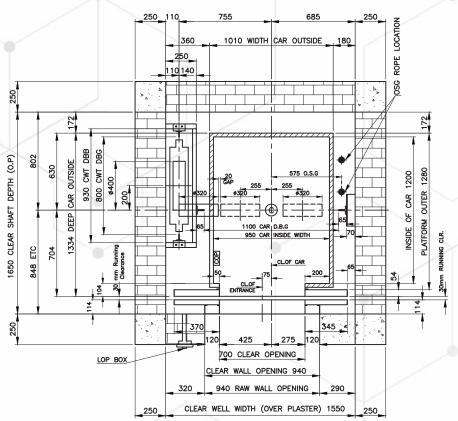

LIFT WELL & CAR PLAN

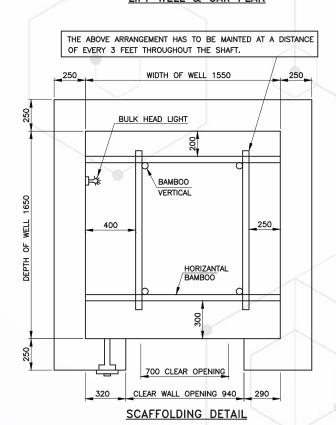



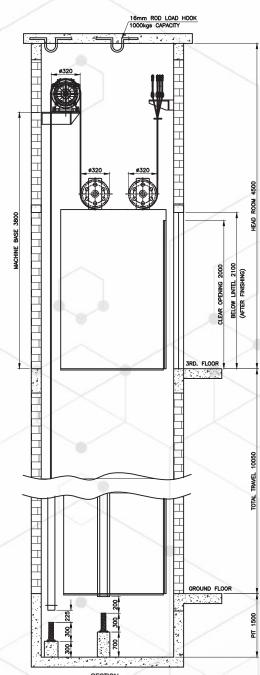

COMPULSORY FEATURE






......

STANDARD CONTROLLER



GEARLESS MACHINE









LOP





OVERSPEED GOVERNOR







MONTANARI GEAREDLESS MACHINE



VALUABLE CLIENT





- Safetyland Estate Pvt. Ltd.
- Mahalaxmi Builders and Developers
- Tathastu Infrastructure
- Krishna Associates
- Prasanti Hospitals
- Arohan Developers Pvt. Ltd.
- Temple City Promoters and Developers
- Score Biotech
- Divyarupa Multi Projects Pvt. Ltd
- Amrita Residency
- Creative Builders & Consultants
- Clavax Power Pvt. Ltd
- Idco, Odisha

- Govt. womens College, sundargarh
- Alishan Royal Developers
- Hotel Lake Queen
- Bluestar Construction & Developers
- Hotel Dream Land
- Evos Buildcon Pvt. Ltd.
- Hotel Seven Hills
- Hotel Dreamland
- Kalinga Institute Of Medical Science
- Gurudev Electrical
- Buildman Ventures Pvt. Ltd
- College Of Engineering Technology
- Kaira Drugs Pvt. Ltd.









WE ARE TECHNICALLY ASSOCIATED WITH:















OUR PRESENCE IN ODISHA:

- BHUBANESWAR
- CUTTACK
- PURI
- JAJPUR
- SAMBALPUR
- BALASORE
- KEONJHAR
- KORAPUT
- BARGARH
- JHARSUGUDA
- ROURKELA
- BERHAMPUR
- KENDRAPADA
- NAYAGARH
- PHULBANI
- NABARANGPUR









UNIT -2

H. No.07-024/2/1/12

Hyderabad Medical, Malkajgiri - 500055

Subhash Nagar

9001:2015

CORPORATE OFFICE:

KEES INDUSTRIES INDIA PVT. LTD.

PLOT NO. 1249/6025, MALLICK COMPLEX, LANE-7, JAGAMARA, BHUBANEWSWAR - 751003

GST: 21AAKCK2531R1ZB

MANUFACTURING UNIT:

UNIT -1

GANPATI PADA, VITARA, NEAR OMKAR ENGINEERING, NAVI MUMBAI INDIA - 400606

GET IN TOUCH

& 8338833831 | 808 | 000 | 0674-2911211

keeslift@gmail.com keesindustries@gmail.com info@keeslift.com

🙀 www.keeslift.com







EMERGENCY SERVICE CALL: 83388 33000

FOLLOW US











